

General info

Technical - Recessed


Family of recessed rectangular LED modules in die-cast aluminum, painted black or white with shiny black polycarbonate reflector. Available in the TRIM version, with frame, or TRIMLESS, with totally vanishing recessed edge.



Ean	8021696267883
Item	LIKA TRIM 21W 4000K
Installation	Recessed
Guarantee	5 years
Gross weight	0.63 kg
Volume	0.001556 m³

Technical info

Net weight	0.48 kg
Insulation class	II
Protection index	IP20
Compliance	-
Operating temperature	-
Dimmer	No dimmerable, On-Off
Power output	50/60 Hz
Power supply	Separato, incluso SI (solo personale qualificato), elettronico
Recessed specifications	273 x 37 - h. min. 70 , 3-30
Load resistance	-
Adjustability	-
Front protection index	-
Accessories not included	-

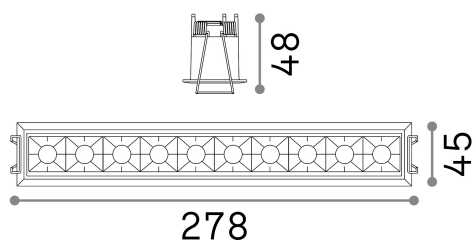

Source info

Integrated source	Modulo LED integrato
Repleaceable source	Sì
Power	21W
Emission	Diretta
Max consupction	max 21 W
Features LED	LED SMD OSRAM
CCT	4000 K
Duration LED (t. 25°C)	-
CRI	90
SDCM	-
Light beam	29°
UGR Maximum	<16
Light beam flux	2500 lm
Useful light flux	1580 lm
Photobiological risk	-
Standby power	-