



Classia Shutter switch

RW4037N - RA4037N - RG4037N
RW4027N - RA4027N - RG4027N

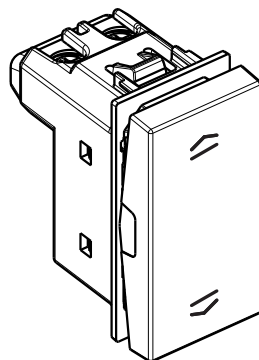

..4037N

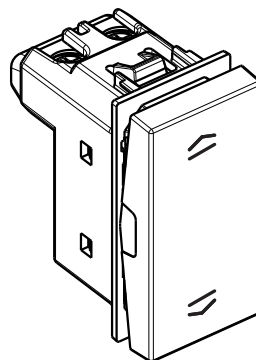

..4027N

Use

Shutter control device for lighting and other loads.


Range

Designation	Item
double push - interlocked 1 module	☐ RW4037N ☒ RA4037N ☒ RG4037N
Changeover switch 1 module	☐ RW4027N ☒ RA4027N ☒ RG4027N

Color code:

☐ White colour ☒ Aluminum colour ☒ Black colour

Overall dimensions (mm)

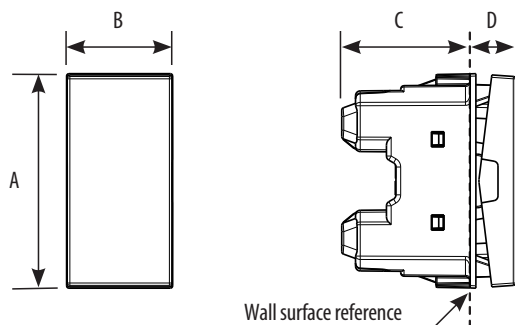

	A	B	C	D
..4037N	45.1	22.3	25.7	10.8
..4027N	45.1	22.3	25.7	10.8

Connection

Terminal type: screw clamp
Terminal capacity: 2 x 2,5 mm² max
Stripping length: 9 mm
Compatible with flexible or rigid cables

Technical characteristics

- Protection index

(considering a complete installation, including cover plate)
Penetration by solid bodies/liquid: IP40

- Mechanical characteristics

Impact test: IK 04

- Material characteristics

Case: PC (Polycarbonate)

Key cover: ABS – ABS/PC

Halogen free.

UV resistant.

Self-extinguishing:

850° C / 30 s for insulating parts holding live parts in place

650° C / 30 s for other parts made of insulating materials

- Electrical characteristics

Voltage: 250 V a.c.

Current: 10 A

- Climatic characteristics

Storage temperature: - 10° C to + 70° C

Use temperature: - 5° C to + 35° C

Cleaning

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards IEC/EN 60669-1.

Refer to e.catalogue.