

ideal lux | Dynamic




DOWNLIGHT

Linear system of lamps with extruded aluminum body with a 50 mm wide and 80 mm high section, modules available in two lengths: 1200 mm and 1800 mm, which can be assembled according to the desired arrangement, possibility of assembling three different source modules: the WIDE diffusing module, the BI-EMISSION module with light component for indirect lighting and the ACCENT module with UGR control lower than 19, integrated LEDs, color temperature options of 3000K or 4000K, starting binning ≤ 3 -Step MacAdam, minimum 80% of luminous flux remaining after 30000 h duration, IP20 protection, insulation class I.

The system is available in anodized aluminum, white and black colors and it is possible to install it in different ways: ceiling-mounted or flush-mounted in plasterboard ceilings. Driver included, integrated in the lighting fitting, available in both DALI and 1-10V dimmable versions. System suitable for locations where professional lighting with minimal design is required, such as OFFICES and SHOPS.



Code	208541
Item name	DYNAMIC SOURCE 10W CRI90 2700K
Source	LED COB CITIZEN
Power	10W
Driver included	DIMTRONIC
Driver available	1-10V DALI
Lumen	1050 Lm
MacAdam	3SDC
Beam	35°
CCT	2700K
CRI	≥ 90
UGR	< 25
LED Life	50.000 h
Insulation class	Class II
IP	54
Material	Aluminum
Warranty	5 years
Net Weight	0,150 Kg
Volume	0,0035 m ³
Base / Hole	$\varnothing 6$ cm

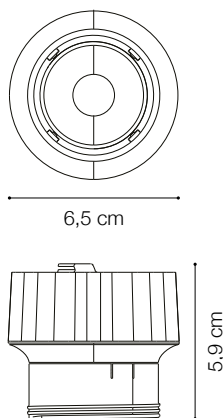



Code	216317
Item name	DYNAMIC DRIVER 10W 1-10V 250mA
Power	10W
Output	10/40Vdc
Current	250 mA
Measure	135 x 20 x 30 mm




Code	216027
Item name	DYNAMIC DRIVER 10W DALI 250mA
Power	13W
Output	15/50Vdc
Current	250 mA
Measure	130 x 30 x 43 mm

Code	211763
Item name	DYNAMIC LENS 20°



Code	211770
Item name	DYNAMIC LENS 55°





Code	216317
Item name	DYNAMIC FILTER HONEYCOMB



Code	208688
Item name	DYNAMIC FILTER ELLIPTICAL

Code	208640
Item name	DYNAMIC LED BULB GU10 ADAPTER WHITE



Code	208657
Item name	DYNAMIC LED BULB GU10 ADAPTER BLACK

